




# PERFORMANCE SPEC SHEET

## 5.00" 7/8 Lobe 2.6 Stage - Fixed

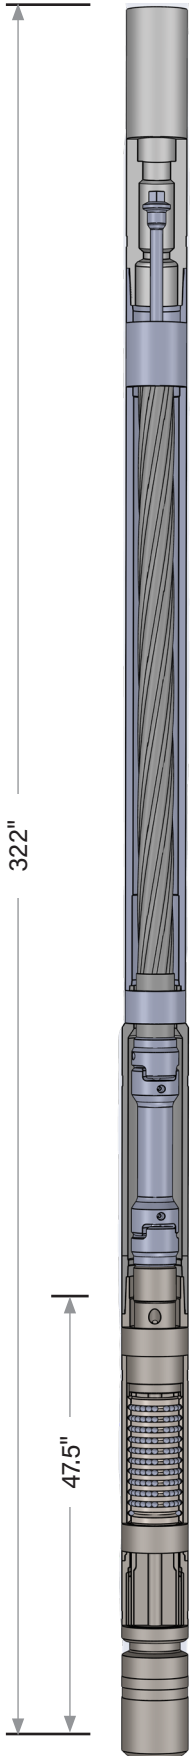


### PHYSICAL DATA

Bit To Bend (in.)	47.5	Top Sub Connection	3 1/2 IF, XT-39
Overall Length (in.)	322	Bit Box Connection	3 1/2 REG
Weight (lbs)	1350	Stator Length	229.3
		Rotor Length	220


### POWER SECTION

Flow Range	150 to 300 GPM	Stall Diff. Press. (psi)	980
RPG	0.263 rev / gal	Stall Torque (ft-lb)	8750
Speed Range	39 to 79 RPM	Max Recommended (HP)	76
Max Diff Press. (psi)	650		
Max. Torque (ft-lb)	5830		

### POWER SECTION FIT CHANGE

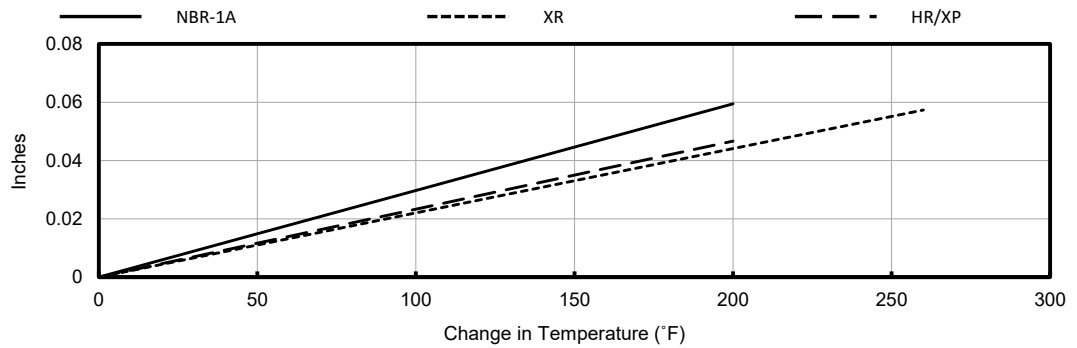

### POWER SECTIONS POWER CURVES

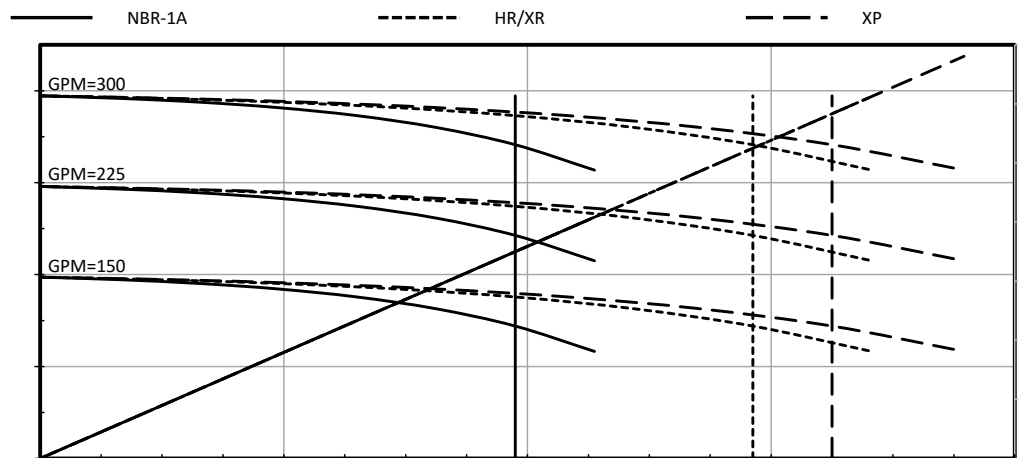

Maximum Differential Pressure Shown as Vertical Lines



# 5.00" 7/8 Lobe 2.6 Stage - Fixed

