




# PERFORMANCE SPEC SHEET

## 5.50" 6/7 Lobe 11.9 Stage - Fixed

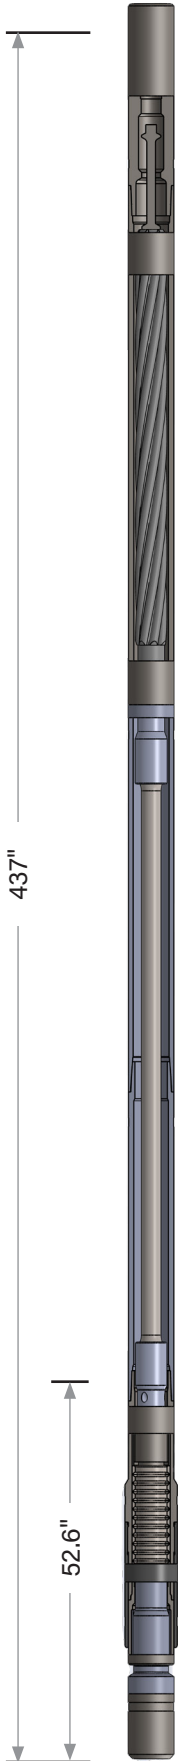


### PHYSICAL DATA

Bit To Bend (in.)	52.6	Top Sub Connection	3 1/2 IF, XT-39
Overall Length (in.)	437	Bit Box Connection	3 1/2 REG, NC-40
Weight (lbs)	1900	Stator Length	280
		Rotor Length	275


### POWER SECTION

Flow Range	150 to 400 GPM	Stall Diff. Press. (psi)	4460
RPG	0.8 rev / gal	Stall Torque (ft-lb)	14370
Speed Range	120 to 320 RPM	Max Recommended (HP)	525
Max Diff Press. (psi)	2980		
Max. Torque (ft-lb)	9580		

### POWER SECTION FIT CHANGE

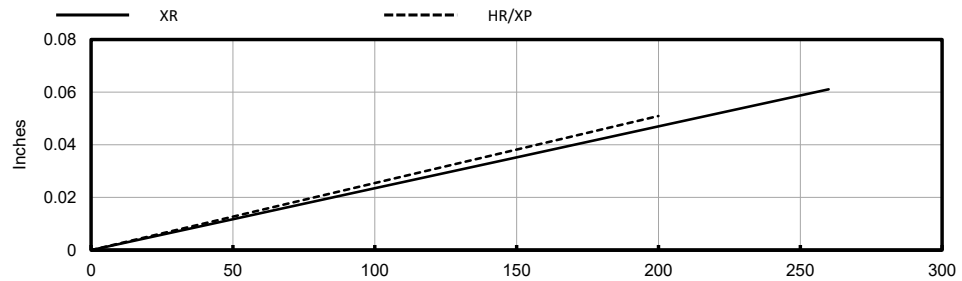

### POWER SECTIONS POWER CURVES

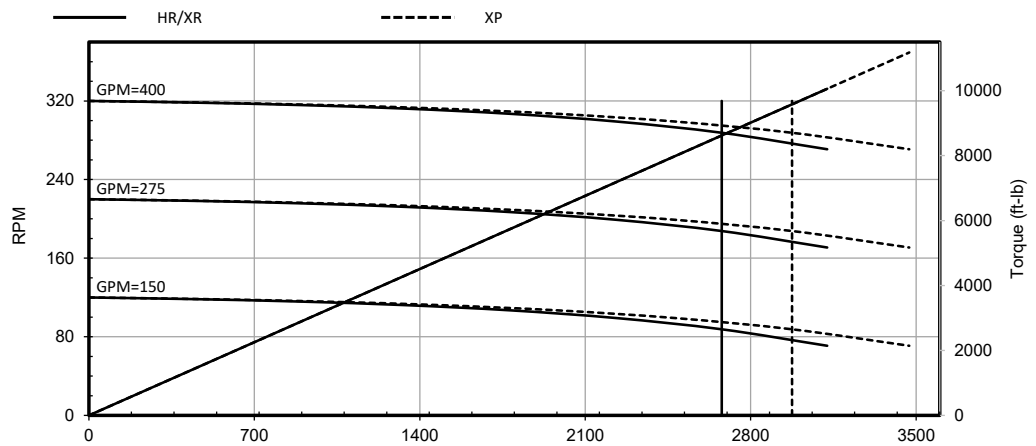

Maximum Differential Pressure Shown as Vertical Lines



# 5.50" 6/7 Lobe 11.9 Stage - Fixed

