




PERFORMANCE SPEC SHEET

5.50" 6/7 Lobe 8.8 Stage - Fixed

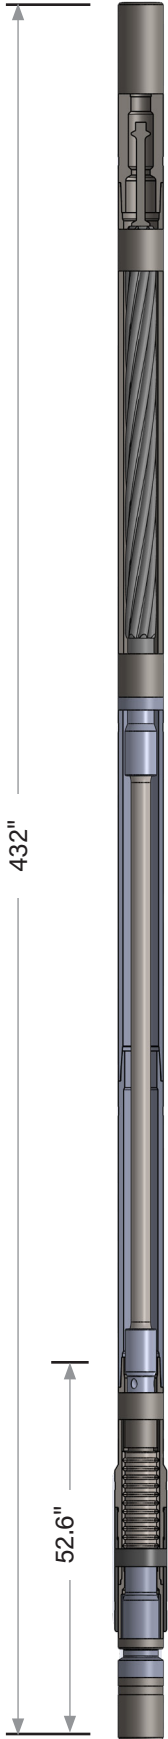


PHYSICAL DATA

Bit To Bend (in.)	52.6	Top Sub Connection	3 1/2 IF, XT-39
Overall Length (in.)	432	Bit Box Connection	3 1/2 REG, NC-40
Weight (lbs)	1800	Stator Length	275
		Rotor Length	265


POWER SECTION

Flow Range	190 to 390 GPM	Stall Diff. Press. (psi)	3300
RPG	0.672 rev / gal	Stall Torque (ft-lb)	12640
Speed Range	128 to 262 RPM	Max Recommended (HP)	365
Max Diff Press. (psi)	2200		
Max. Torque (ft-lb)	8420		

POWER SECTION FIT CHANGE

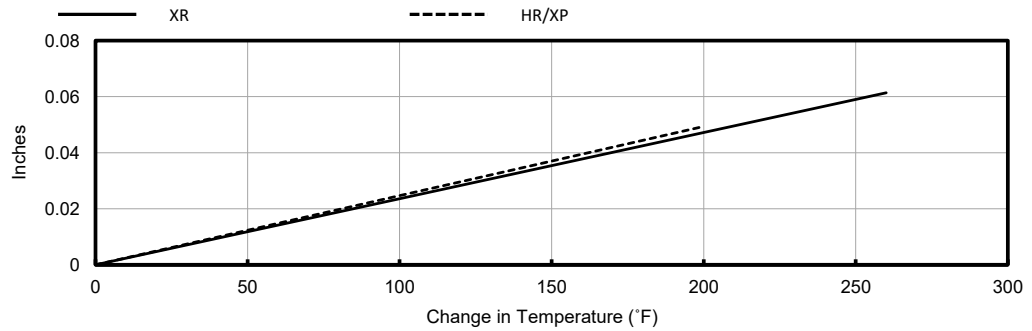

POWER SECTIONS POWER CURVES

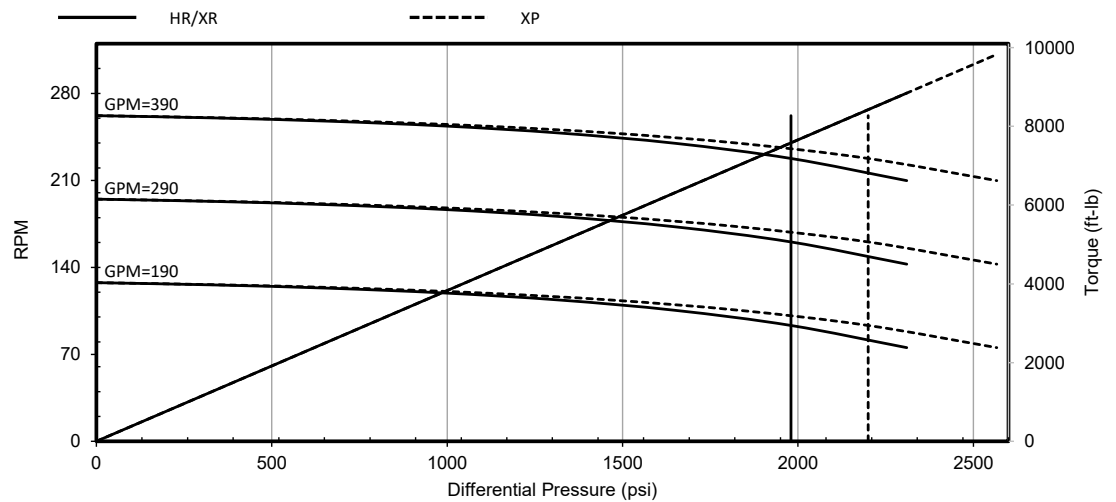

Maximum Differential Pressure Shown as Vertical Lines



5.50" 6/7 Lobe 8.8 Stage - Fixed

