




PERFORMANCE SPEC SHEET

6.60" x 6.75" 7/8 Lobe 5.7 Stage - Fixed

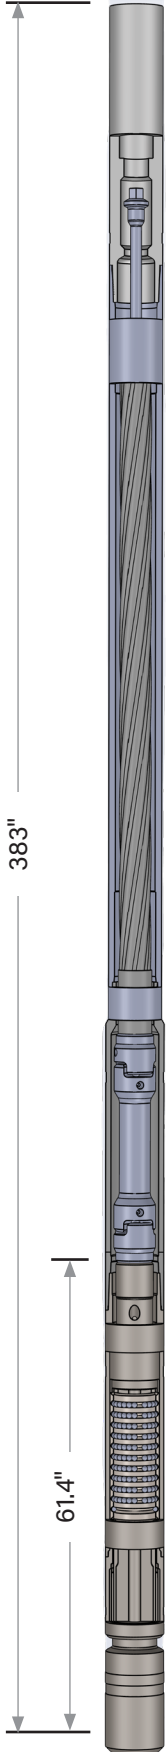


PHYSICAL DATA

Bit To Bend (in.)	61.4	Top Sub Connection	4 1/2 IF, 4 1/2 XH
Overall Length (in.)	383	Bit Box Connection	4 1/2 REG
Weight (lbs)	2750	Stator Length	260
		Rotor Length	252


POWER SECTION

Flow Range	300 to 650 GPM	Stall Diff. Press. (psi)	2140
RPG	0.242 rev / gal	Stall Torque (ft-lb)	22870
Speed Range	73 to 157 RPM	Max Recommended (HP)	389
Max Diff Press. (psi)	1430		
Max. Torque (ft-lb)	15240		

POWER SECTION FIT CHANGE

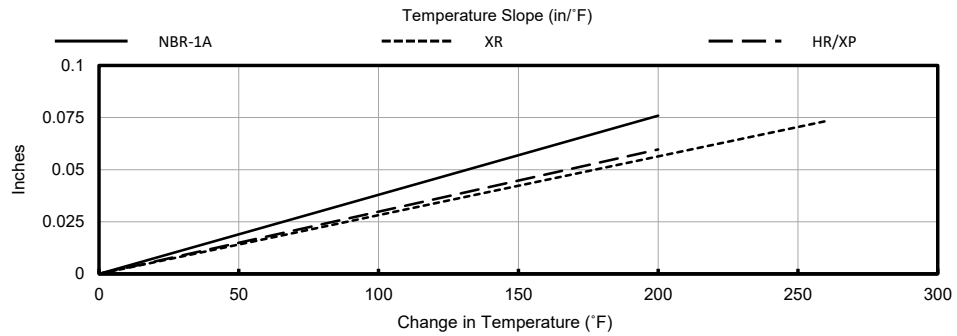

POWER SECTIONS POWER CURVES

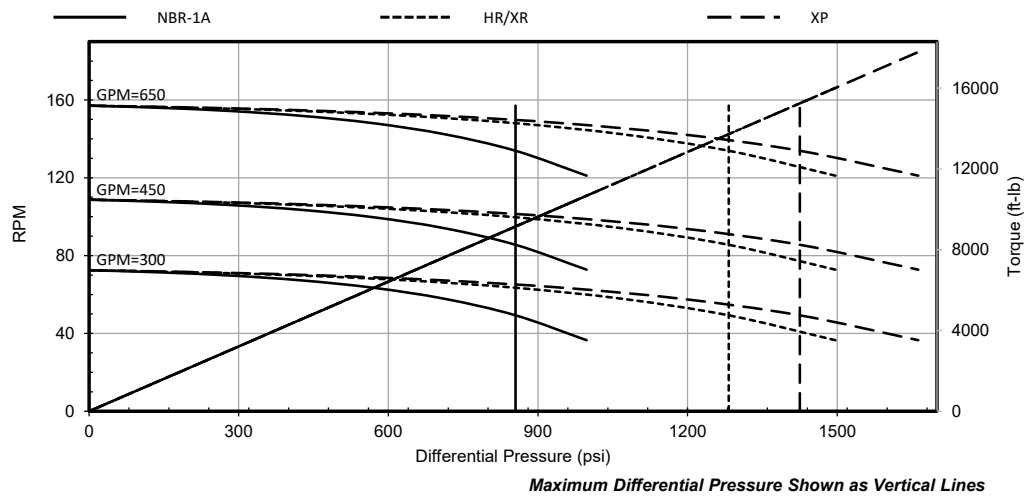



6.60" x 6.75" 7/8 Lobe 5.7 Stage - Fixed

