




# PERFORMANCE SPEC SHEET

## 6.75" 4/5 Lobe 7.0 Stage - Fixed

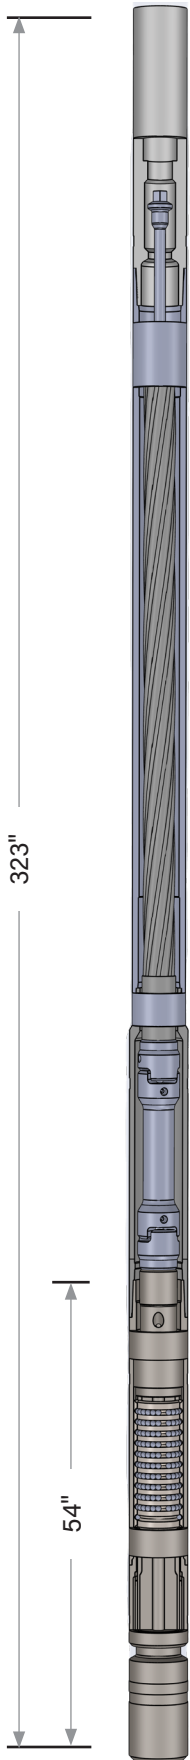


### PHYSICAL DATA

Bit To Bend (in.)	54	Top Sub Connection	4 1/2 IF, 4 1/2 XH
Overall Length (in.)	323	Bit Box Connection	4 1/2 REG
Weight (lbs)	2200	Stator Length	210
		Rotor Length	202.5

### POWER SECTION

Flow Range	300 to 600 GPM	Stall Diff. Press. (psi)	2630
RPG	0.497 rev / gal	Stall Torque (ft-lb)	15150
Speed Range	149 to 298 RPM	Max Recommended (HP)	476
Max Diff Press. (psi)	1750		
Max. Torque (ft-lb)	10100		

### PERFORMANCE CURVE

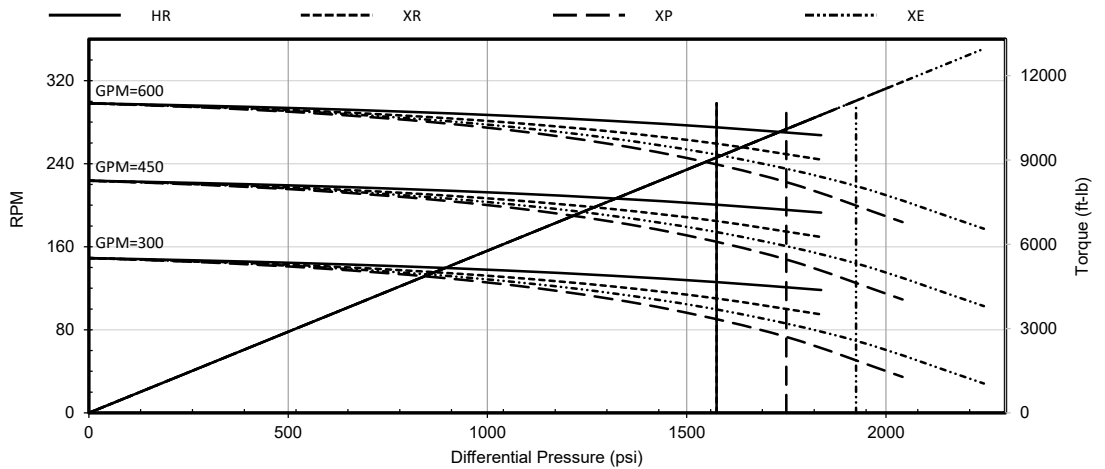

Maximum Differential Pressure Shown as Vertical Lines



# 6.75" 4/5 Lobe 7.0 Stage - Fixed

