




PERFORMANCE SPEC SHEET

8.25" 7/8 Lobe 7.0 Stage - Fixed

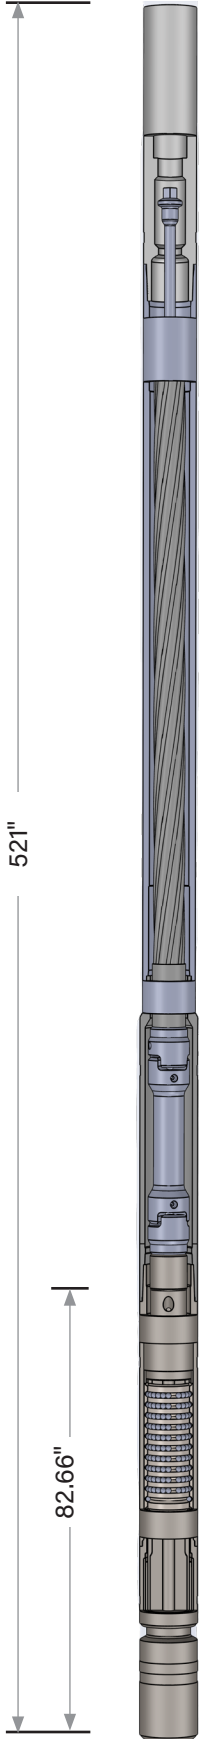


PHYSICAL DATA

Bit To Bend (in.)	82.66	Top Sub Connection	6 5/8 REG
Overall Length (in.)	521	Bit Box Connection	6 5/8 REG
Weight (lbs)	5613	Stator Length	300
		Rotor Length	295.25

POWER SECTION

Flow Range	400 to 1000 GPM	Stall Diff. Press. (psi)	2600
RPG	0.155 rev / gal	Stall Torque (ft-lb)	39700
Speed Range	60 to 160 RPM	Max Recommended (HP)	
Max Diff Press. (psi)	1650		
Max. Torque (ft-lb)	25210		

POWER SECTIONS POWER CURVES

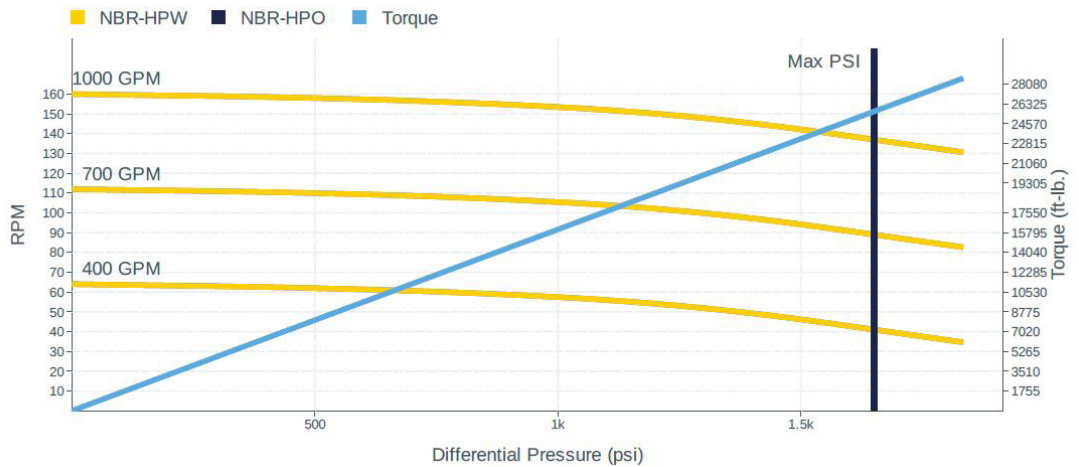



8.25" 7/8 Lobe 7.0 Stage - Fixed

