




# PERFORMANCE SPEC SHEET

## 9.63" 5/6 Lobe 4.0 Stage - Fixed

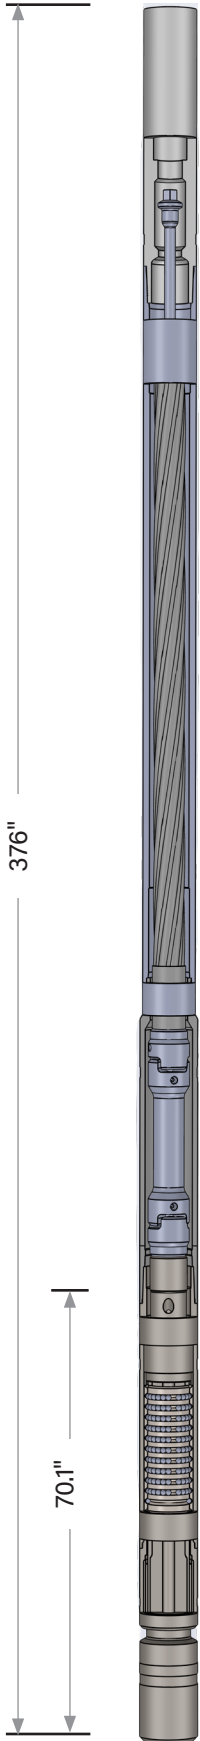


### PHYSICAL DATA

Bit To Bend (in.)	70.1	Top Sub Connection	6 5/8 REG, 7 5/8 REG
Overall Length (in.)	376	Bit Box Connection	6 5/8 REG, 7 5/8 REG
Weight (lbs)	5850	Stator Length	228
		Rotor Length	218

### POWER SECTION

Flow Range	600 to 1200 GPM	Stall Diff. Press. (psi)	1350
RPG	0.108 rev / gal	Stall Torque (ft-lb)	28850
Speed Range	65 to 130 RPM	Max Recommended (HP)	434
Max Diff Press. (psi)	900		
Max. Torque (ft-lb)	21370		

### POWER SECTIONS POWER CURVES

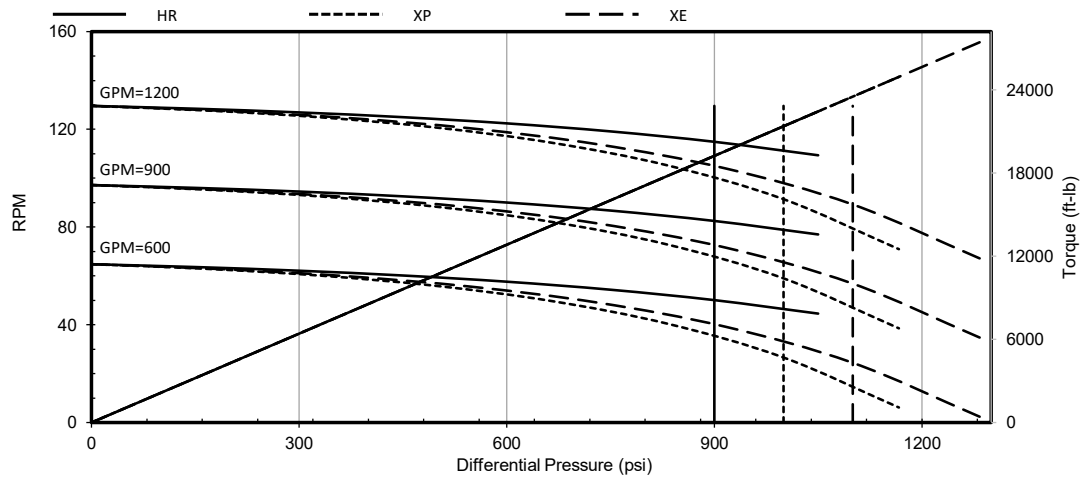



# 9.63" 5/6 Lobe 4.0 Stage - Fixed

