




PERFORMANCE SPEC SHEET

9.63" x 8.00" 7/8 Lobe 5.9 Stage - Fixed

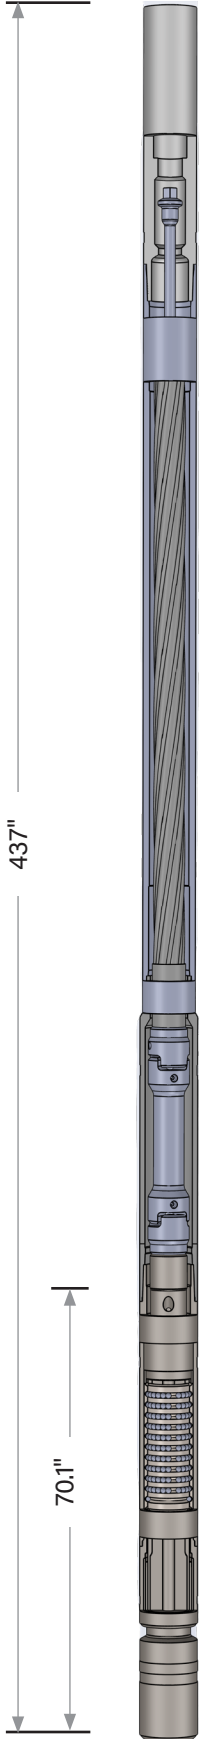


PHYSICAL DATA

| | | | |
|----------------------|------|--------------------|----------------------|
| Bit To Bend (in.) | 70.1 | Top Sub Connection | 6 5/8 REG, 7 5/8 REG |
| Overall Length (in.) | 437 | Bit Box Connection | 6 5/8 REG, 7 5/8 REG |
| Weight (lbs) | 6000 | Stator Length | 300 |
| | | Rotor Length | 292.5 |


POWER SECTION

| | | | |
|-----------------------|----------------|--------------------------|-------|
| Flow Range | 400 to 900 GPM | Stall Diff. Press. (psi) | 2210 |
| RPG | 0.15 rev / gal | Stall Torque (ft-lb) | 36700 |
| Speed Range | 60 to 135 RPM | Max Recommended (HP) | 540 |
| Max Diff Press. (psi) | 1480 | | |
| Max. Torque (ft-lb) | 24470 | | |

POWER SECTION FIT CHANGE

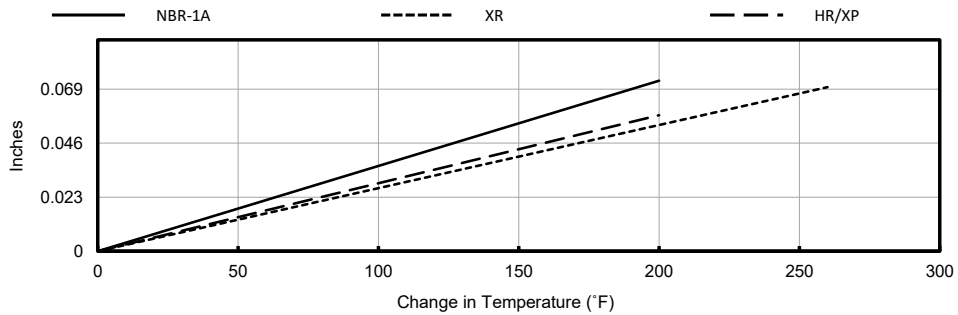

POWER SECTIONS POWER CURVES

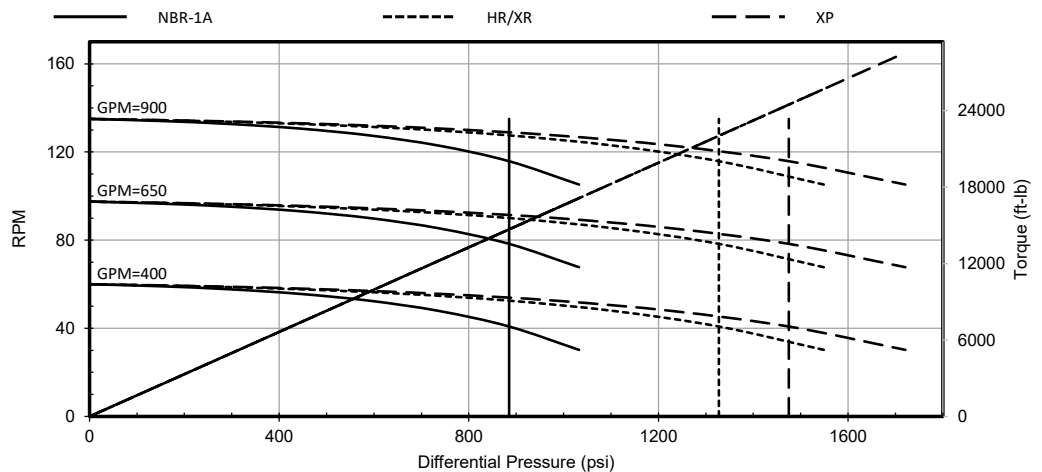



PERFORMANCE SPEC SHEET

9.63" x 8.00" 7/8 Lobe 5.9 Stage - Fixed

