




PERFORMANCE SPEC SHEET

9.63" x 9.00" 6/7 Lobe 6.6 Stage - Fixed

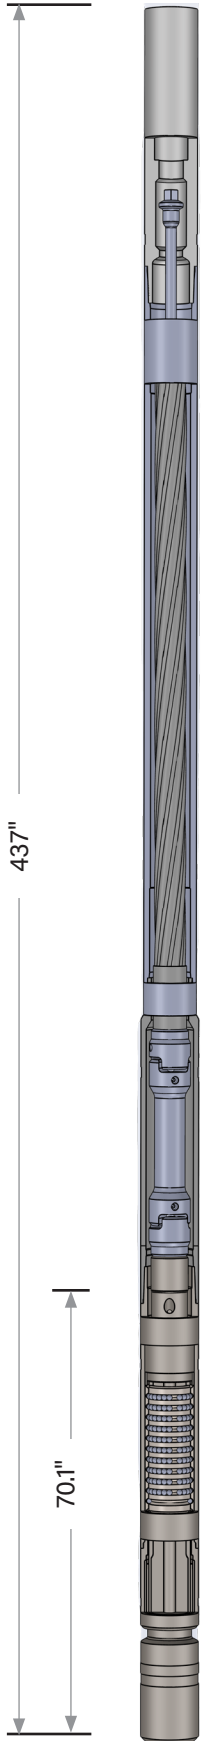


PHYSICAL DATA

Bit To Bend (in.)	70.1	Top Sub Connection	6 5/8 REG, 7 5/8 REG
Overall Length (in.)	437	Bit Box Connection	6 5/8 REG, 7 5/8 REG
Weight (lbs)	6650	Stator Length	300
		Rotor Length	292.5

POWER SECTION

Flow Range	600 to 1300 GPM	Stall Diff. Press. (psi)	2480
RPG	0.135 rev / gal	Stall Torque (ft-lb)	47230
Speed Range	81 to 176 RPM	Max Recommended (HP)	921
Max Diff Press. (psi)	1650		
Max. Torque (ft-lb)	31480		

POWER SECTIONS POWER CURVES

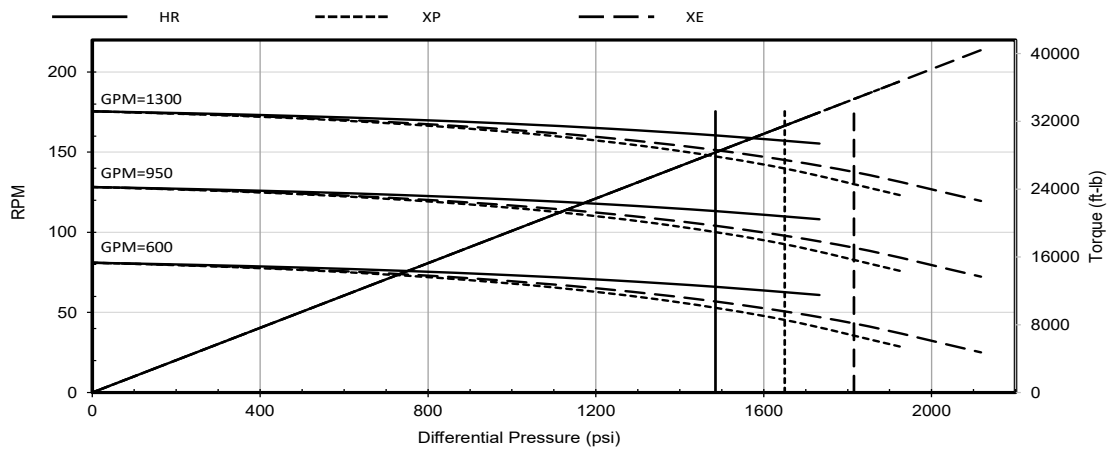



9.63" x 9.00" 6/7 Lobe 6.6 Stage - Fixed

