




PERFORMANCE SPEC SHEET

5.00" 6/7 8.8 Fixed

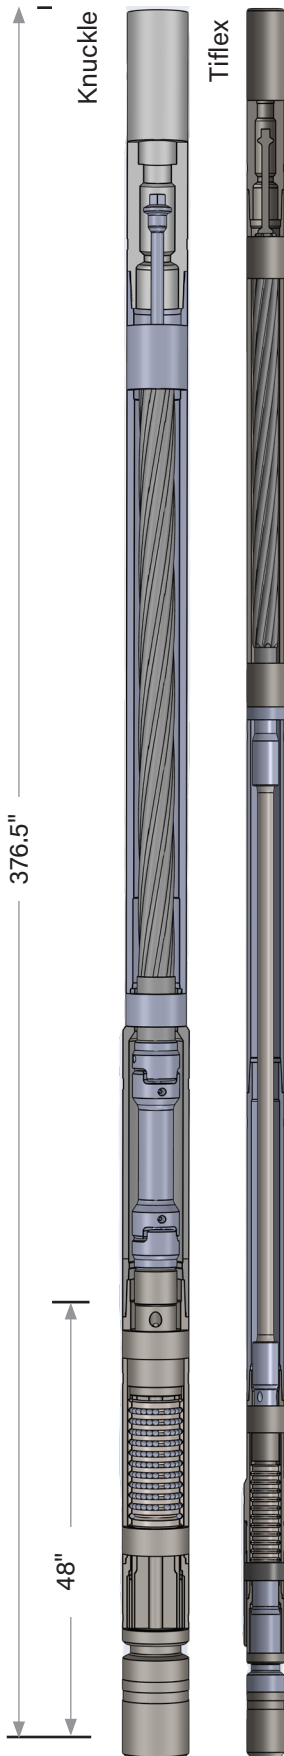


PHYSICAL DATA

Bit To Bend (in.)	48	Top Sub Connection	3 1/2 IF, XT-39
Overall Length (in.)	376.5	Bit Box Connection	3 1/2 REG
Weight (lbs)	1466	Stator Length	275
		Rotor Length	265


POWER SECTION

Flow Range	150 to 400 GPM	Stall Diff. Press. (psi)	2780
RPG	0.66 rev / gal	Stall Torque (ft-lb)	10260
Speed Range	100 to 260 RPM	Max Recommended (HP)	379
Max Diff Press. (psi)	2070		
Max. Torque (ft-lb)	7660		

POWER SECTION FIT CHANGE

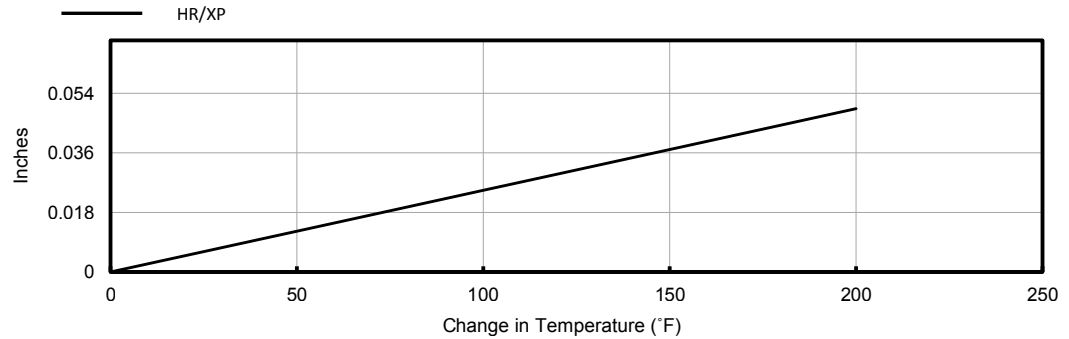


POWER SECTIONS POWER CURVES

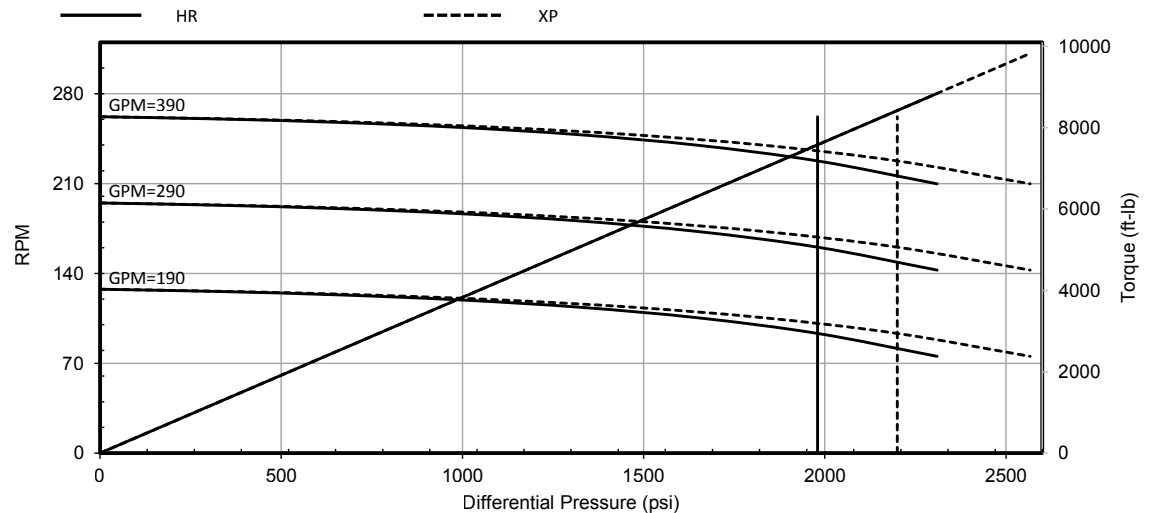

Maximum Differential Pressure Shown as Vertical Lines

5.00" 6/7 8.8 Fixed

KNUCKLE

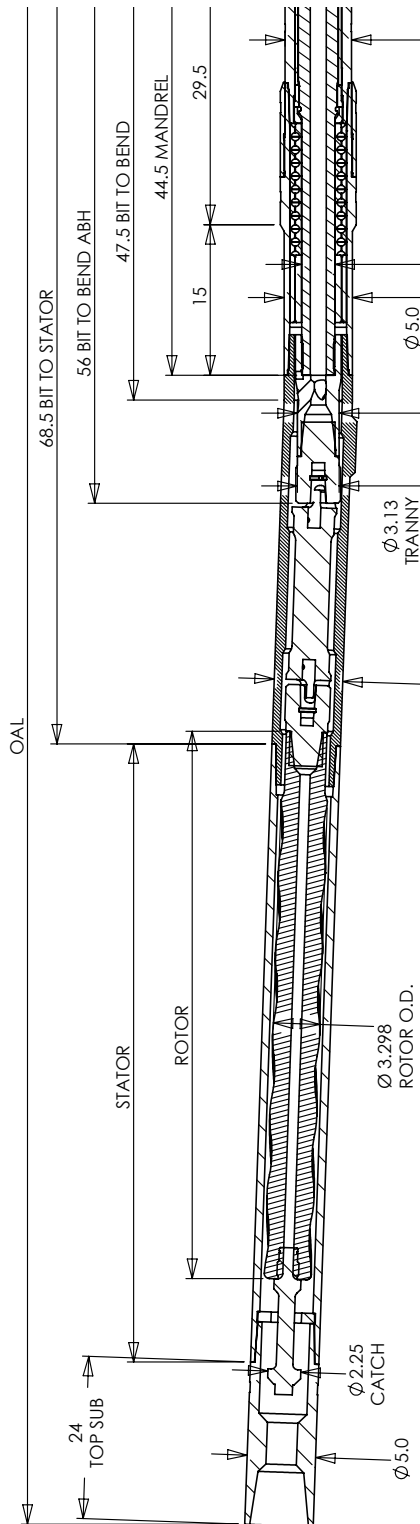

TIFLEX

