




## PERFORMANCE SPEC SHEET

# 6.75" 4/5 7.0 Fixed

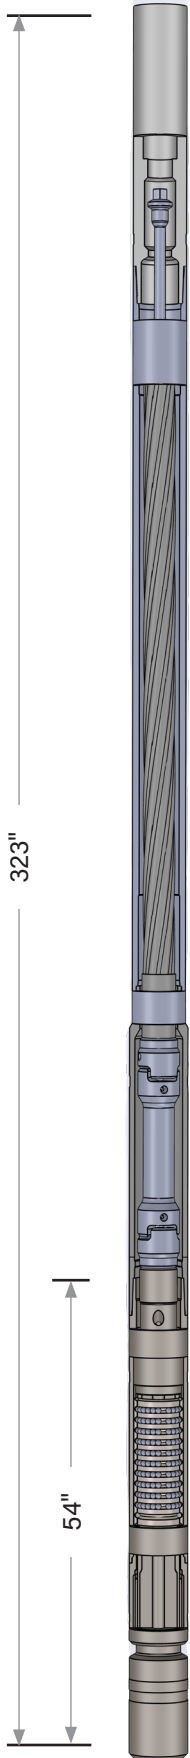


### PHYSICAL DATA

|                      |      |                    |                    |
|----------------------|------|--------------------|--------------------|
| Bit To Bend (in.)    | 54   | Top Sub Connection | 4 1/2 IF, 4 1/2 XH |
| Overall Length (in.) | 323  | Bit Box Connection | 4 1/2 REG          |
| Weight (lbs)         | 2200 | Stator Length      | 210                |
|                      |      | Rotor Length       | 202.5              |

### POWER SECTION

|                       |                 |                          |       |
|-----------------------|-----------------|--------------------------|-------|
| Flow Range            | 300 to 600 GPM  | Stall Diff. Press. (psi) | 2630  |
| RPG                   | 0.497 rev / gal | Stall Torque (ft-lb)     | 15150 |
| Speed Range           | 149 to 298 RPM  | Max Recommended (HP)     | 476   |
| Max Diff Press. (psi) | 1930            |                          |       |
| Max. Torque (ft-lb)   | 11110           |                          |       |

### PERFORMANCE CURVE

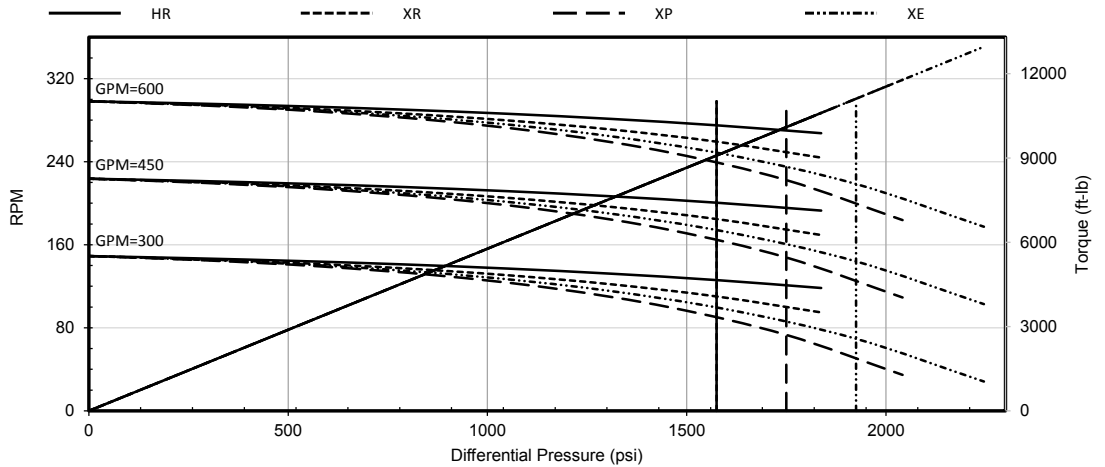

Maximum Differential Pressure Shown as Vertical Lines

# 6.75" 4/5 7.0 Fixed

## KNUCKLE

