




PERFORMANCE SPEC SHEET

6.75" 7/8 5.0 Fixed

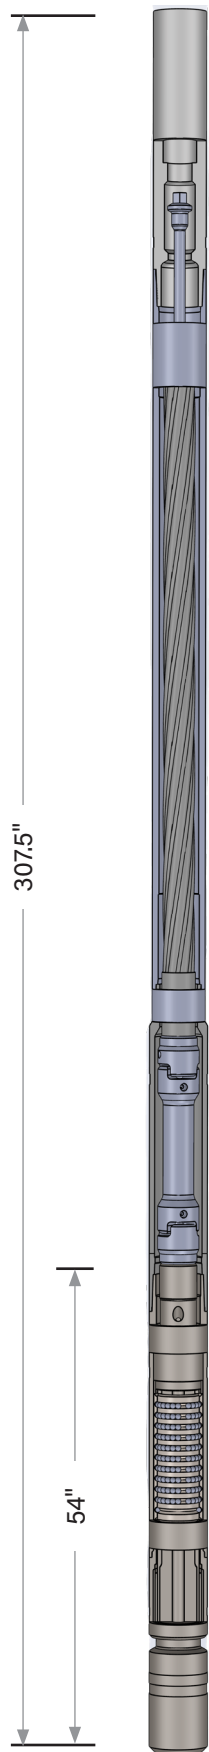


PHYSICAL DATA

Bit To Bend (in.)	54	Top Sub Connection	4 1/2 IF, 4 1/2 XH
Overall Length (in.)	307.5	Bit Box Connection	4 1/2 REG
Weight (lbs)	2200	Stator Length	194.5
		Rotor Length	188

POWER SECTION

Flow Range	300 to 600 GPM	Stall Diff. Press. (psi)	1880
RPG	0.288 rev / gal	Stall Torque (ft-lb)	17440
Speed Range	86 to 187 RPM	Max Recommended (HP)	321
Max Diff Press. (psi)	1380		
Max. Torque (ft-lb)	12790		

PERFORMANCE CURVE

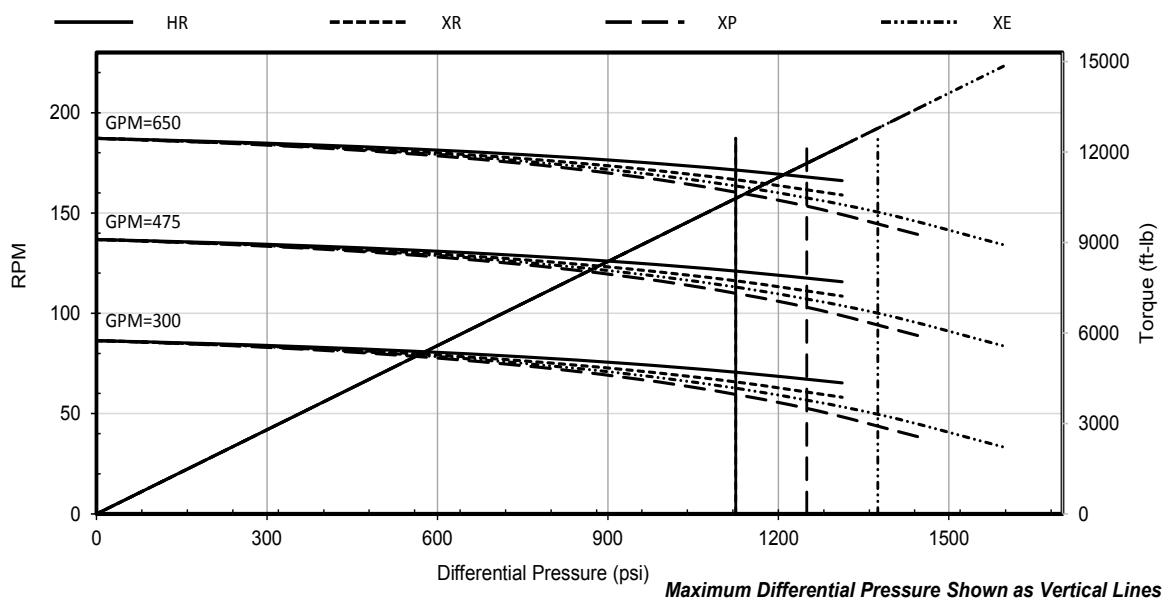

6.75" 7/8 5.0 Fixed

KNUCKLE

