




PERFORMANCE SPEC SHEET

7.00" 5/6 8.3 Fixed

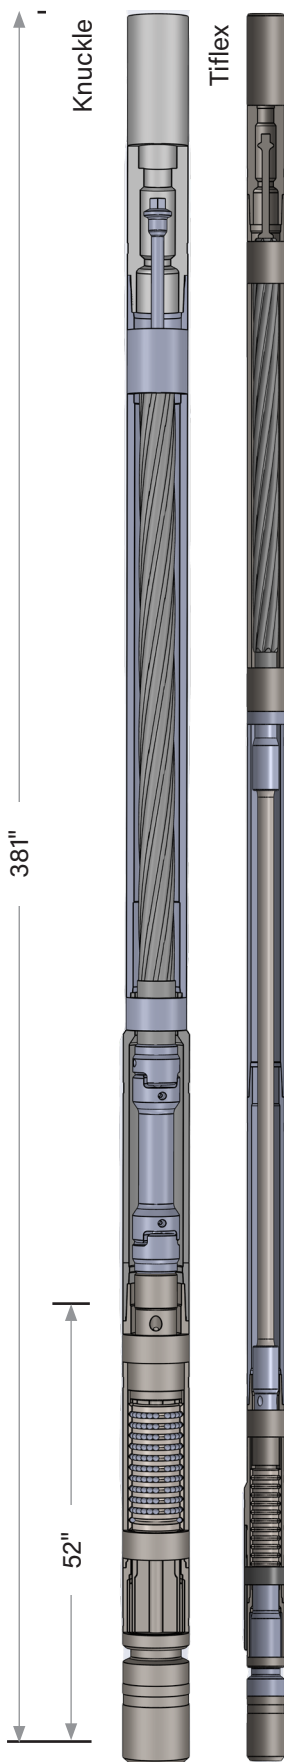


PHYSICAL DATA

Bit To Bend (in.)	52	Top Sub Connection	4 1/2 IF, 4 1/2 XH
Overall Length (in.)	381	Bit Box Connection	4 1/2 REG
Weight (lbs)	3318	Stator Length	233
		Rotor Length	260

POWER SECTION


Flow Range	350 to 750 GPM	Stall Diff. Press. (psi)	3080
RPG	0.38 rev / gal	Stall Torque (ft-lb)	20530
Speed Range	130 to 290 RPM	Max Recommended (HP)	719
Max Diff Press. (psi)	1960		
Max. Torque (ft-lb)	13030		

PERFORMANCE CURVE

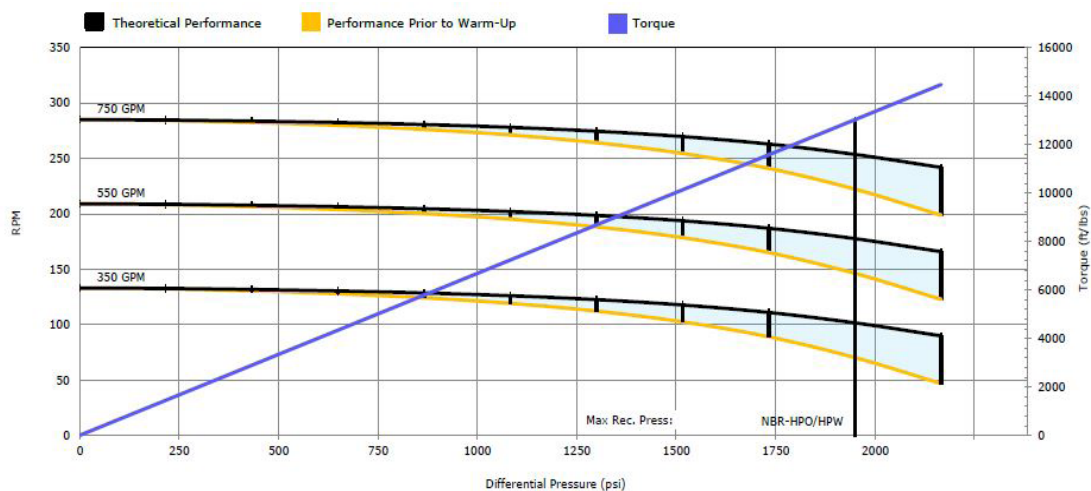

7.00" 5/6 8.3 Fixed

NUCKLE

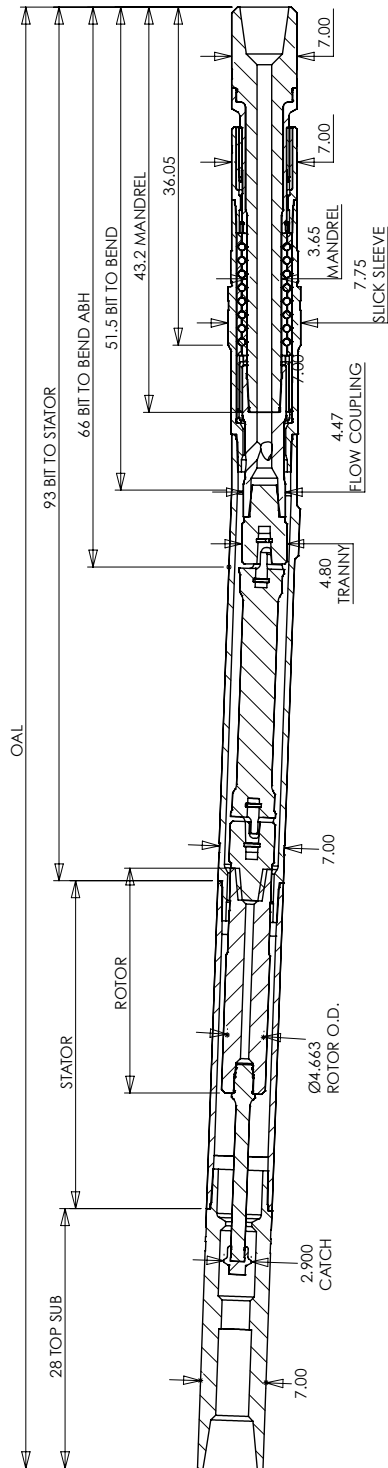

TIFLEX

