




PERFORMANCE SPEC SHEET

8.00" 7/8 4.0 Fixed

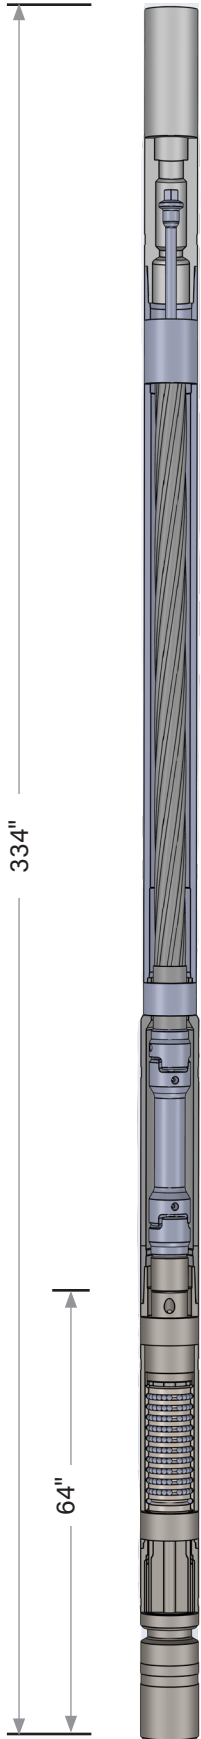


PHYSICAL DATA

Bit To Bend (in.)	64	Top Sub Connection	6 5/8 REG
Overall Length (in.)	334	Bit Box Connection	6 5/6 REG
Weight (lbs)	4600	Stator Length	203.2
		Rotor Length	196.3

POWER SECTION

Flow Range	400 to 900 GPM	Stall Diff. Press. (psi)	1500
RPG	0.166 rev / gal	Stall Torque (ft-lb)	24880
Speed Range	66 to 149 RPM	Max Recommended (HP)	405
Max Diff Press. (psi)	1100		
Max. Torque (ft-lb)	18250		

PERFORMANCE CURVE

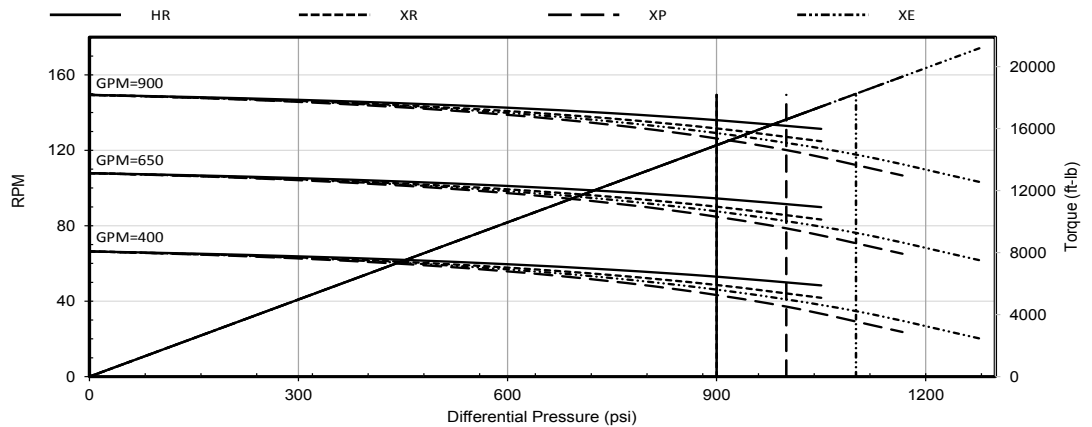

KNUCKLE

