




PERFORMANCE SPEC SHEET

8.25" 7/8 5.3 Fixed

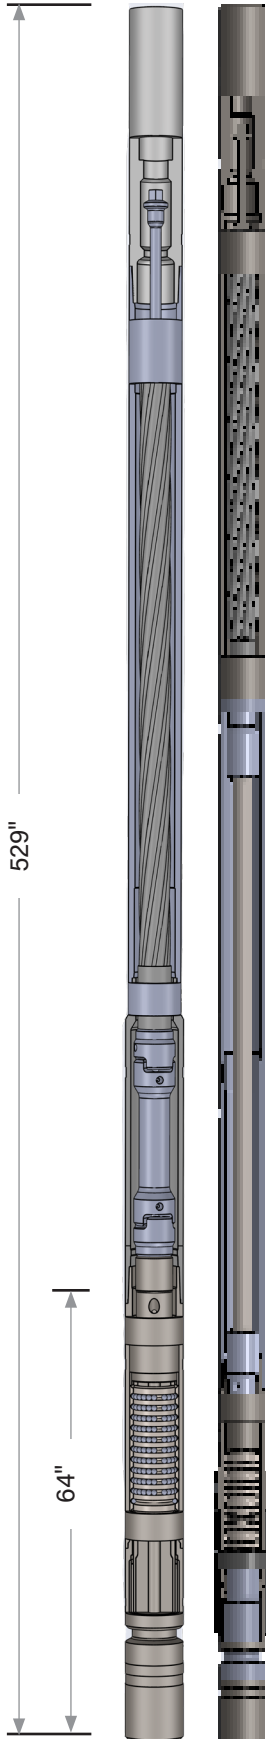


PHYSICAL DATA

Bit To Bend (in.)	64	Top Sub Connection	6 5/8 REG
Overall Length (in.)	529	Bit Box Connection	6 5/8 REG
Weight (lbs)	5613	Stator Length	300
		Rotor Length	295.25

POWER SECTION


Flow Range	600 to 1000 GPM	Stall Diff. Press. (psi)	1970
RPG	0.11 rev / gal	Stall Torque (ft-lb)	43140
Speed Range	70 to 110 RPM	Max Recommended (HP)	574
Max Diff Press. (psi)	1250		
Max. Torque (ft-lb)	27390		

POWER SECTIONS POWER CURVES

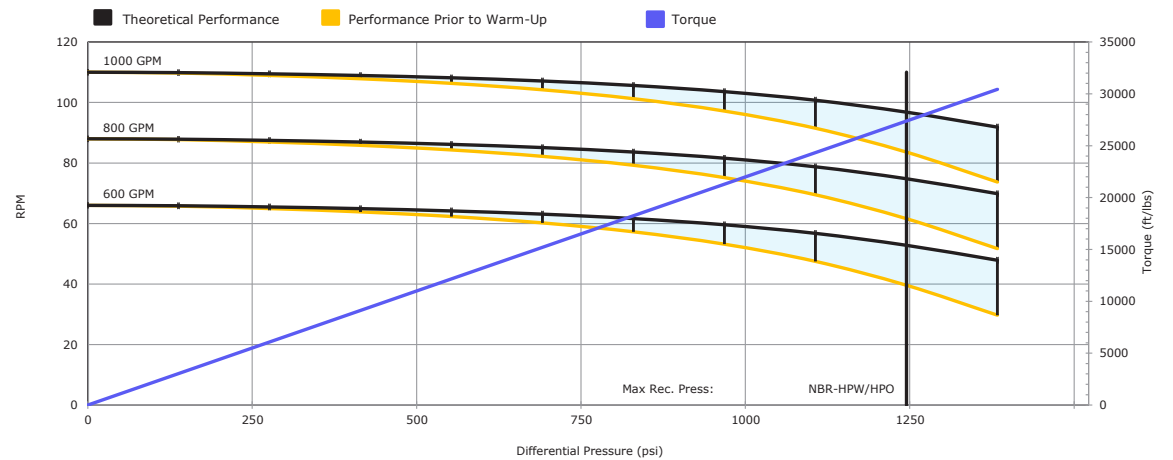

8.25" 7/8 5.3 Fixed

GNU

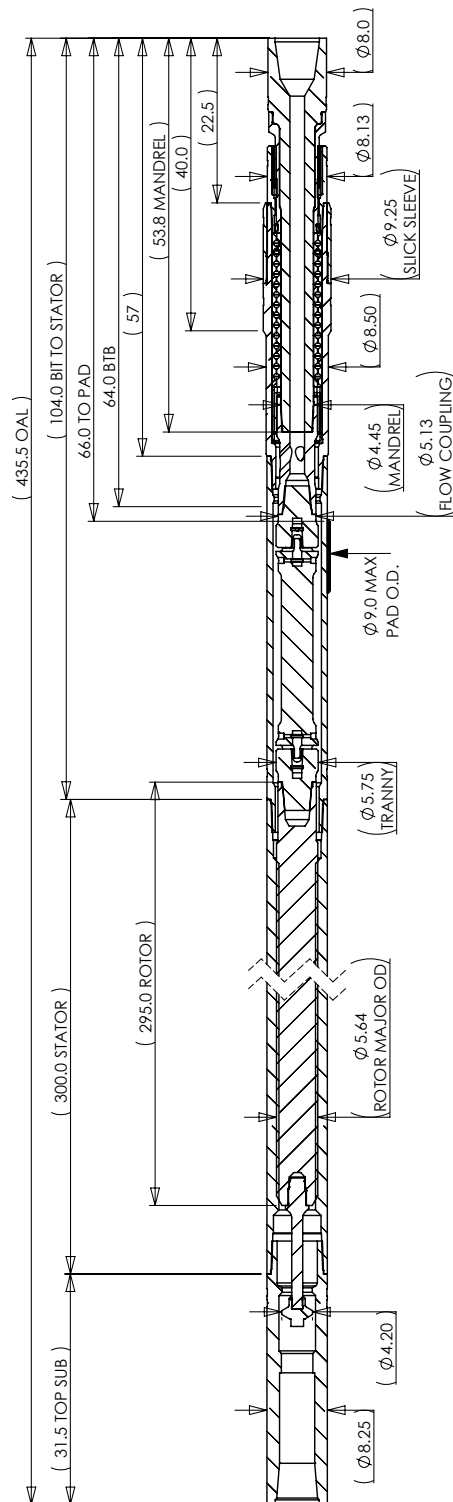

TIFLEX

