




PERFORMANCE SPEC SHEET

9.63" x 8.00" 7/8 5.9 Fixed

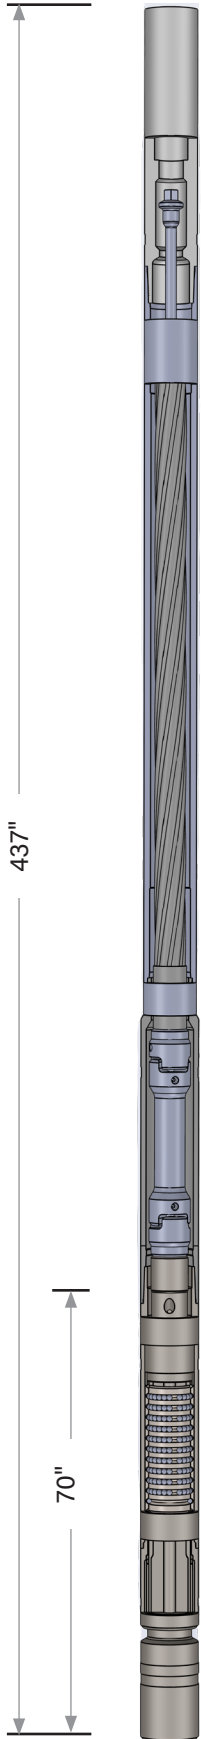


PHYSICAL DATA

Bit To Bend (in.)	70	Top Sub Connection	6 5/8 REG, 7 5/8 REG
Overall Length (in.)	437	Bit Box Connection	6 5/8 REG, 7 5/8 REG
Weight (lbs)	6000	Stator Length	300
		Rotor Length	292.5


POWER SECTION

Flow Range	400 to 900 GPM	Stall Diff. Press. (psi)	2210
RPG	0.15 rev / gal	Stall Torque (ft-lb)	36700
Speed Range	60 to 135 RPM	Max Recommended (HP)	540
Max Diff Press. (psi)	1620		
Max. Torque (ft-lb)	26920		

POWER SECTION FIT CHANGE

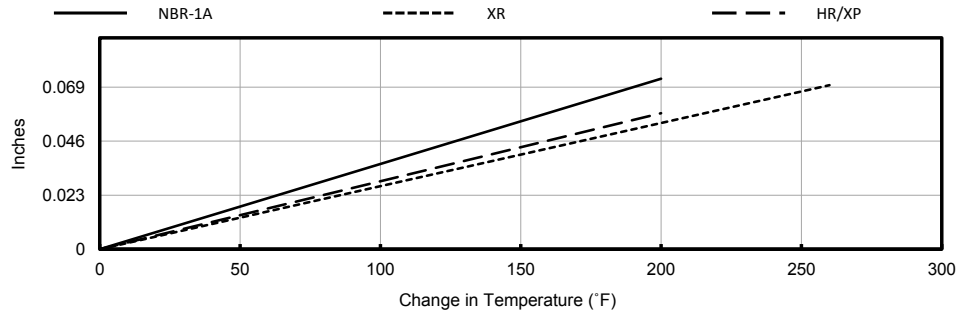

POWER SECTIONS POWER CURVES

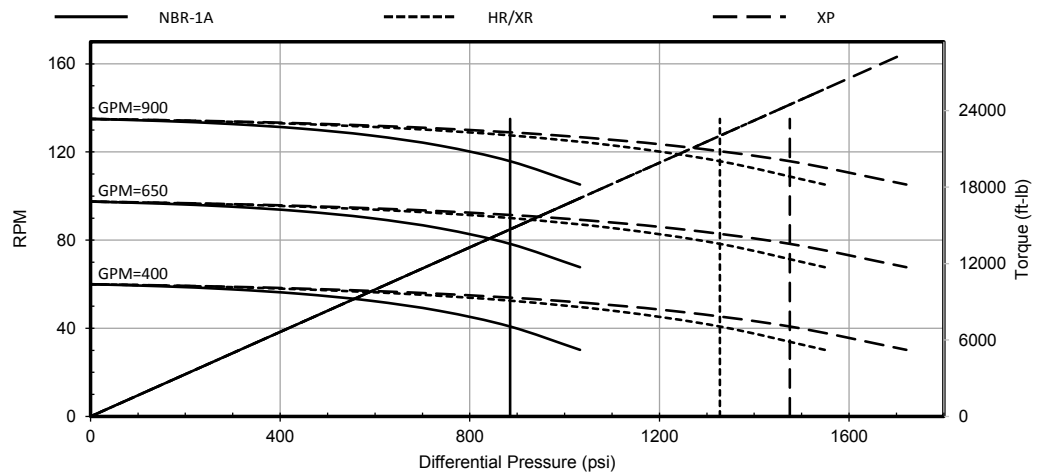

9.63" x 8.00" 7/8 5.9 Fixed

KNUCKLE

