




PERFORMANCE SPEC SHEET

9.63" x 8.25" 7/8 7.0 Fixed

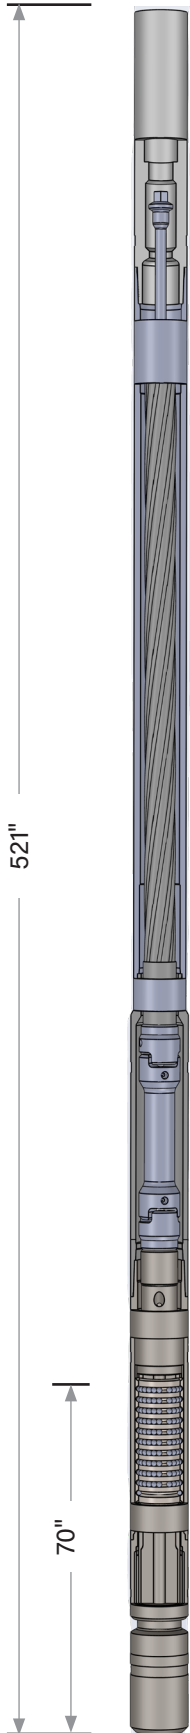


PHYSICAL DATA

Bit To Bend (in.)	70	Top Sub Connection	6 5/8 REG, 7 5/8 REG
Overall Length (in.)	521	Bit Box Connection	6 5/8 REG, 7 5/8 REG
Weight (lbs)	6613	Stator Length	300
		Rotor Length	295.25

POWER SECTION

Flow Range	400 to 1000 GPM	Stall Diff. Press. (psi)	2600
RPG	0.155 rev / gal	Stall Torque (ft-lb)	39700
Speed Range	60 to 160 RPM	Max Recommended (HP)	768
Max Diff Press. (psi)	1650		
Max. Torque (ft-lb)	25210		

POWER SECTIONS POWER CURVES

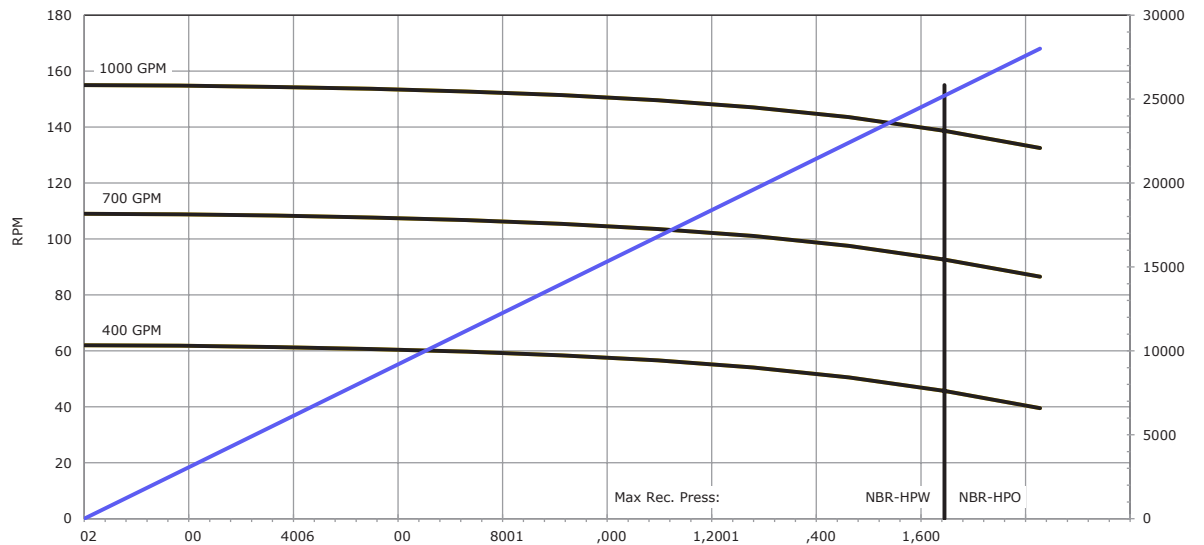

9.63" x 8.25" 7/8 7.0 Fixed

KNUCKLE

