




## PERFORMANCE SPEC SHEET

# 9.63" x 9.00" 6/7 6.6 Fixed

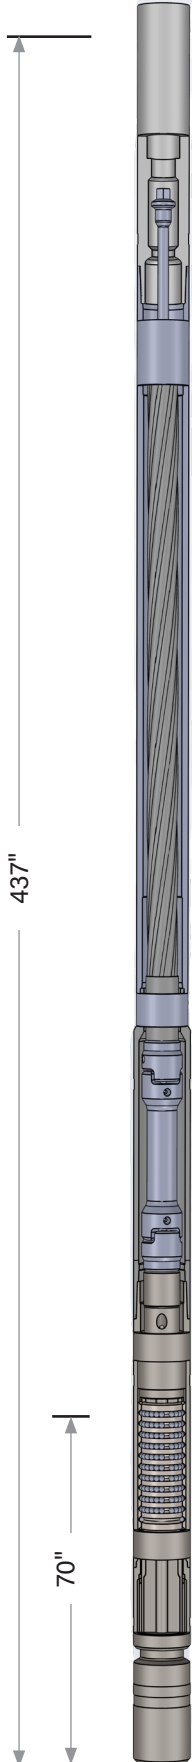


### PHYSICAL DATA

|                      |      |                    |                      |
|----------------------|------|--------------------|----------------------|
| Bit To Bend (in.)    | 70   | Top Sub Connection | 6 5/8 REG, 7 5/8 REG |
| Overall Length (in.) | 437  | Bit Box Connection | 6 5/8 REG, 7 5/8 REG |
| Weight (lbs)         | 6650 | Stator Length      | 300                  |
|                      |      | Rotor Length       | 292.5                |

### POWER SECTION

|                       |                 |                          |       |
|-----------------------|-----------------|--------------------------|-------|
| Flow Range            | 600 to 1300 GPM | Stall Diff. Press. (psi) | 2480  |
| RPG                   | 0.135 rev / gal | Stall Torque (ft-lb)     | 47230 |
| Speed Range           | 81 to 176 RPM   | Max Recommended (HP)     | 921   |
| Max Diff Press. (psi) | 1820            |                          |       |
| Max. Torque (ft-lb)   | 34630           |                          |       |

### POWER SECTIONS POWER CURVES

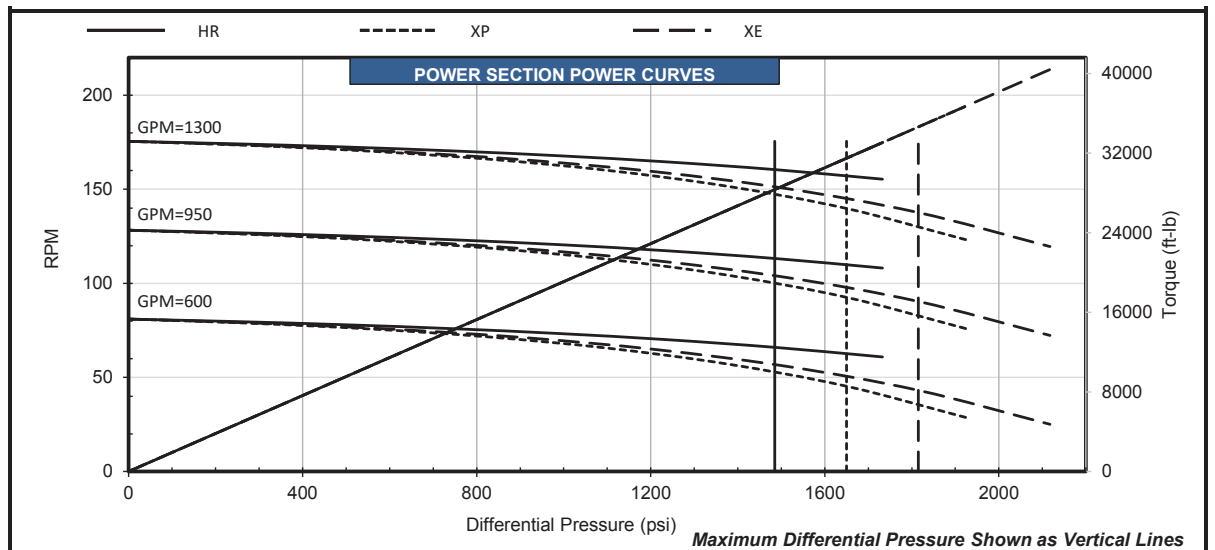

**9.63" x 9.00" 6/7 6.6 Fixed**

**NUCKLE**

